

2:1 Shrink Ratio, Diesel-Resistant, Flexible, Heat Shrinkable Elastomeric Polyolefin Tubing



DUNBAR-DR150 is flexible elastomer polyolefin tubing, resistant to aviation and diesel fuels, hydraulic fluids, and lubrication oils. It reliably protects wires, solder joints, terminals, connections and components from most industrial fuels, abrasion and mechanical damage.

STANDARDS:

- SAE AS23053/16 (Formerly AMS-DTL-23053/16)
- Declared Dimensional Life (DDL) – 5 Years
- RoHS & REACH Compliant

PRODUCT FEATURES:

- Shrink ratio: 50% or more in the radial direction, 10% or less in the axial direction ☐ In stock for immediate shipments
- Continuous operating temperature: - 75°C (-103°F) to 150°C (302°F)
- Flammability: ASTM D2671 Procedure A, C
- High resistance to aviation fuels, diesel fuels, and oils
- Heavy wall, flexible tubing

Specification Values

Property		Test Method	Value	
Physical	Unaged	Tensile Strength	Min. 1700 psi	
		Elongation	Min. 250%	
		Tensile Strength @ 100% Elongation	Max. 1500 psi	
	Aged	Tensile Strength	160°C/168 hrs	Min. 1500 psi
		Elongation		Min. 200%
	Fluid Resist.	Tensile Strength	24°C/24 hrs 6 Fluids	Min. 1500 psi
		Elongation		Min. 200%
		Dielectric Strength		Min. 200 Volts/mil
	Low Temperature Flex		-65°Cx4hrs	No cracks
	Heat Shock		200°Cx4hrs	No cracks, flowing, or dripping
Specific Gravity		ASTM D792	Max. 1.5	
Electrical	Dielectric Strength	ASTM D2671	Min. 300 Volts/mil	
	Volume Resistivity	ASTM D876	Min. 10 ⁹ Ω · cm	
Chemical	Copper Corrosion	275°C/16hrs	No corrosion	
	Fungus Resistance	ASTM G21	Rating less than 1	
	Water Absorption	ASTM D570	Max. 2.0	
	Flammability	ASTM D2671	Pass	


MATRIX PRECISION CONVERTING

Your Application. Our Expertise.

Matrix specializes in precision cutting and converting of engineered materials to meet the exact specifications required by manufacturers. Our state-of-the-art equipment and expertise ensure precise customization, providing manufacturers with streamlined solutions to enhance their product quality and performance.

DUNBAR-DR150

2:1 SHRINK RATIO, DIESEL-RESISTANT, FLEXIBLE, HEAT SHRINKABLE ELASTOMERIC POLYOLEFIN TUBING

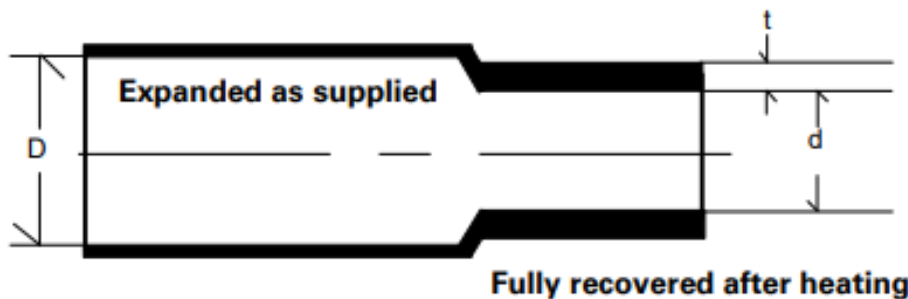

Product Dimensions

Minimum Shrink Temperature: 135 °C

Size	Expanded		Recovered				Standard Spool Length
	Internal Diameter (Minimum) (D)		Internal Diameter (Maximum) (d)		Wall Thickness (Minimum) (t)		
	in.	mm	in.	mm	in.	mm	ft
1/8"	0.125	3.2	0.062	1.6	0.025	0.6	500
3/16"	0.188	4.8	0.093	2.4	0.025	0.6	250
1/4"	0.250	6.4	0.125	3.2	0.025	0.6	250
3/8"	0.375	9.5	0.187	4.7	0.030	0.8	100
1/2"	0.500	12.7	0.250	6.4	0.033	0.8	100
3/4"	0.750	19.1	0.375	9.5	0.042	1.1	100
1"	1.00	25.4	0.500	12.7	0.050	1.3	100
1-1/4"	1.25	31.8	0.712	18.1	0.086	1.6	100
1-1/2"	1.50	38.1	0.750	19.1	0.070	1.8	100